



## Installation of DIMM1 Memory

- Step 1 Turn off the system and unplug the power cord.  
 Step 2 Turn the system upside down to locate screws at the bottom and then loosen all screws.

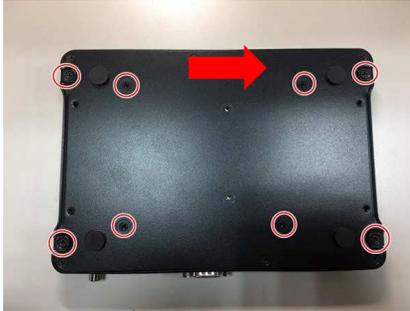

- Step 3 Open the TOP and SIDE cover.  
 Step 4 Located the DIMM socket on main board.  
 Step 5 Locate the memory module, insert a gold colored contact into the socket and push the module two end latches till locked.

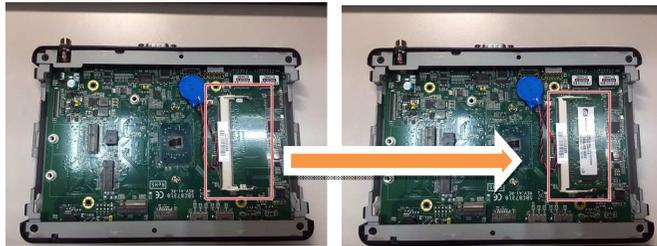

- Step 6 Put the TOP & SIDE cover and fasten eight screws back onto the system.

**Note:** Please refer to the user's manual to get more detail information.


## DSP300-318 Quick Installation Guide

### Packing List

System Unit x 1	DVD/CD x 1 (for Driver & Manual)
Quick Installation Guide x 1	36W power adapter x 1
US power cord x 1 or EU power cord x 1	Foot Pad x 4

- Do not try to apply power to the system if any damaged components.

### Dimensions

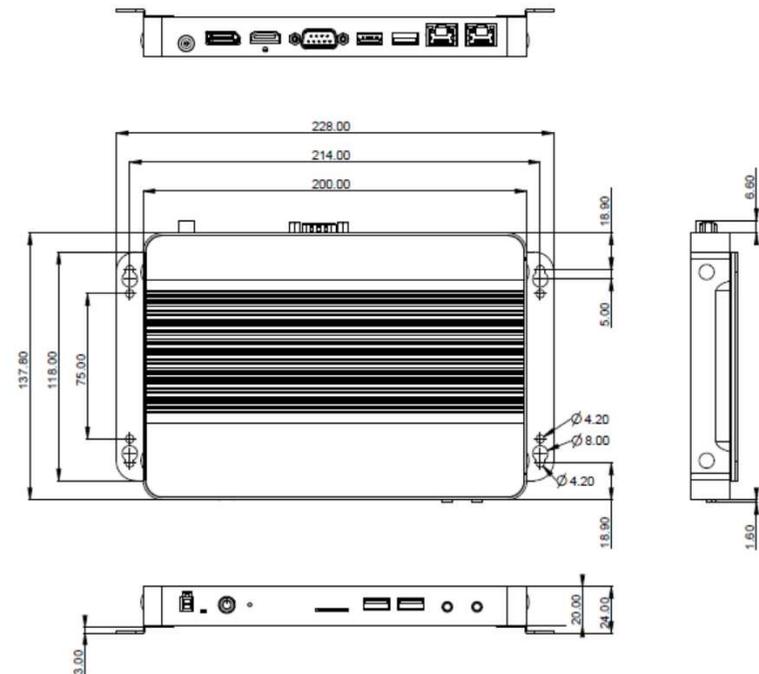

## I/O Outlets

The following figures show I/O outlets on the DSP300-318.

### Front View



### Rear View




1	12VDC power input	9	Line-out
2	DP	10	USB 3.0
3	HDMI	11	SIM card
4	Serial Port	12	Reset switch
5	USB 2.0	13	Power switch
6	USB 3.0	14	HDD LED
7	GbE LAN ports	15	Remote power switch
8	MIC-in		

## Installation of M.2 SSD Storage Module

- Step 1 Turn off the system and unplug the power cord.
- Step 2 Turn the system upside down to locate screws at the bottom and then loosen all screws.



- Step 3 Open the TOP and SIDE cover.
- Step 4 Located the M.2 socket on main board.
- Step 5 Identify the M.2 slot, insert a M.2 SATA SSD module into the socket and then fasten a screw.

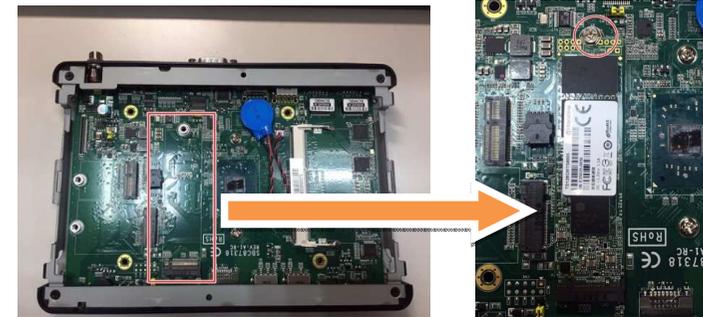

- Step 6 Put the TOP & SIDE cover and fasten eight screws back onto the system