


# I/O board for Pico-ITX board

## Attached as Accessory


### AX93265

Specification: 1 x RS-232/422/485, 1 x RS-232, 4 x USB2.0, 1 x Audio (MIC-IN/Line-out),  
1 x power-on, 1 x Reset, 2 x LED  
Dimension: 118 x 29 mm  
Compliant Product: PICO830, PICO831




### AX93267

Specification: 1 x DC Jack, 1 x VGA, 1 x Gigabit LAN  
Dimension: 100 x 26 mm  
Compliant Product: PICO831, PICO841, PICO843

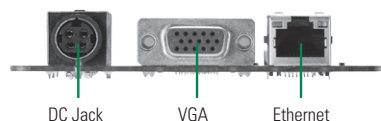

### AX93283


Specification: 1 x RS-232/422/485, 1 x RS-232, 4 x USB2.0, 1 x Audio (MIC-IN/Line-out),  
1 x power-on, 1 x Reset, 2 x LED  
Dimension: 118 x 29 mm  
Compliant Product: PICO840, PICO841, PICO843



## Ordered by Optional

### AX93275

Specification: 1 x RS-232/422/485, 1 x RS-232, 4 x USB3.0, 1 x VGA,  
1 x Audio (MIC-IN/Line-out), 1 x power-on, 1 x Reset, 2 x LED  
Dimension: 118 x 40 mm  
Compliant Product: PICO880, PICO500, PICO300




#### Ordering Information

AX93275	P/N: E393275100
---------	-----------------

### AX93276

Specification: 1 x RS-232/422/485, 1 x RS-232, 4 x USB3.0, 1 x HDMI, 1 x Gigabit LAN,  
1 x power-on, 1 x Reset, 2 x LED  
Dimension: 118 x 40 mm  
Compliant Product: PICO880, PICO500, PICO300




#### Ordering Information

AX93276	P/N: E393276100
---------	-----------------

### AX93292

Specification: 1 x RS-232/422/485, 1 x RS-232, 4 x USB2.0, 1 x Audio (MIC-IN/Line-out),  
1 x power-on, 1 x Reset, 2 x LED  
Dimension: 118 x 29 mm  
Compliant Product: PICO880, PICO500, PICO300

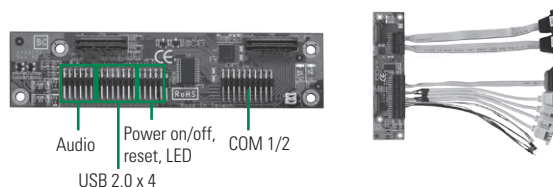

#### Ordering Information

AX93292	P/N: E393292100
Cable for COM	P/N: 594H8302100E
Cable for Audio+USB+LED	P/N: 59340000200E

SBC  
Services  
and Solutions

Systems  
on  
Modules

Embedded  
SBCs  
>EPIC

Embedded  
SBCs  
>3.5" Capa

Embedded  
SBCs  
>Nano-ITX

Embedded  
SBCs  
>Pico-ITX

Embedded  
SBCs  
>PC/104

Industrial  
Motherboards

Slot CPU  
Cards

ARM  
Embedded  
Boards

**7**  
Accessories

Appendix

