


OPS500-501-H NEW

Open Pluggable Specification (OPS) Digital Signage with 6th/7th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor and Intel® H110 Chipset

Features

- Intel® Open Pluggable Specification (OPS compliance)
- 6th/7th gen Intel® Core™ i7/i5/i3 & Celeron® processor (Skylake/Kaby Lake)
- DDR4-2133 SO-DIMM, up to 16GB
- 1 PCIe Mini Card slot
- Easy installation and maintenance
- HDMI for 2nd ultra HD display with 4K@60 Hz resolution

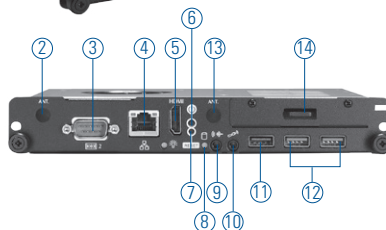

- | | | |
|---------------------|---------------------|-----------------------|
| 1. JAE TX-25A | 6. Power switch | 11. 1 x USB 2.0 |
| 2. Optional antenna | 7. Reset | 12. 2 x USB 3.0 |
| 3. RS-232 | 8. HDD indicator | 13. Optional antenna |
| 4. Ethernet | 9. Audio (Line-out) | 14. 2.5" SATA HDD |
| 5. HDMI output | 10. Audio (Mic-in) | 15. 12VDC power input |



1. Expansion slot
15. 12VDC power input



Specifications

| | | |
|--|--|---|
| Main System | CPU | LGA1151 socket 6th/7th generation Intel® Core™ and Celeron® processor |
| | Chipset | Intel® H110 |
| | System Memory | 1 x 260-pin DDR4-2133 SO-DIMM, up to 16GB |
| | Storage | 1 x 2.5" SATA HDD tray 1 x mSATA (Option) |
| | Watchdog Timer | 255 levels, 1-255 sec. |
| I/O | 2 x USB 3.0 | |
| | 1 x USB 2.0 | |
| | 1 x 10/100/1000 Mbps Ethernet (Intel® i219LM) | |
| | 1 x HDMI with 4K resolution | |
| | 1 x RS-232 (COM 2) | |
| | 1 x Power on/off button | |
| | 1 x Reset button | |
| | 1 x Audio (Line-out) | |
| | 1 x Audio (Mic-in) | |
| | 1 x DisplayPort (4K@60Hz via OPS JAE interconnector) | |
| | 1 x HDMI 2.0 (4K@60Hz via OPS JAE interconnector) | |
| | 2 x USB 2.0 (via OPS JAE interconnector) | |
| | 1 x USB 3.0 (via OPS JAE interconnector) | |
| | 1 x Audio (Line-out, via OPS JAE interconnector) | |
| | 1 x UART (TX/RX, via OPS JAE interconnector) (COM 1) | |
| 1 x 12 VDC power input by adapter option | | |
| Indicator | 1 x LED for system power on | |
| | 1 x LED for HDD active | |
| WiFi | 802.11 b/g/n (optional) | |
| Expansion Slot | 1 x full-size PCIe Mini Card (USB+PCI Express+SATA Signal) | |
| Dimensions | 200 mm (7.87") (W) x 119 mm (4.68") x 30 mm (1.18") | |
| Packing Dimension | 270 mm (10.63") (W) x 197 mm (7.76") x 70mm (2.76") | |
| Weight (net/gross) | 1 kg (2.21lb)/ 1.5 kg (3.3 lb) | |
| Environmental | 0°C ~ +45°C (+32°F ~ +113°F) (with airflow 1.2m/s) | |

Packing

- 1 x Driver CD
- 1 x Thermal grease
- 2 x M2 x 5 screw
- 2 x M4 x 6 screw

Optional OS Installation

Windows® 8.1, Windows® 10

Ordering Information

Standard


OPS500-501-H OPS digital signage player with LGA1151 socket Intel® Core™ i7/i5/i3 & Celeron® processor

Optional

AX93167 OPS docking board with 4K solution
AX93190 OPS docking board with 4K/60 Hz solution+WLAN kit

* Specifications and certifications may vary contingent on options.

Dimensions

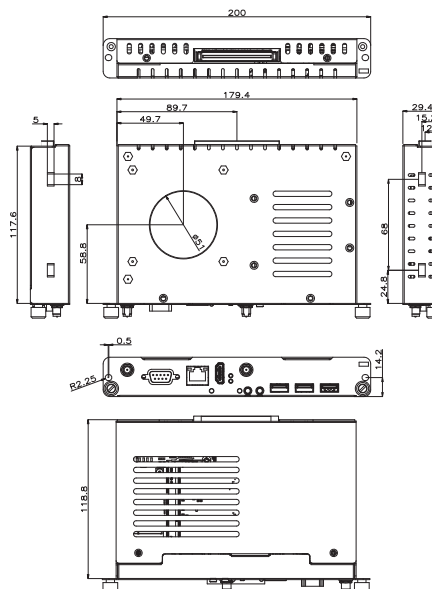

* All specifications and photos are subject to change without notice.